

Solid-state Relay

G3S/G3SD

Ultra-small Relay Breaks up to 1 A

- Ultra-small, dual in-line package (DIP) SSR.
- Terminals compatible with G6B Electromagnetic Relay's. Mix with G6Bs as the application requires.
- Close side-by-side mounting possible. In addition, heat sink dedicated to this mounting style also available.
- Both AC- and DC-load versions available.
- High isolation of 2,500 VAC between input and output freeing inputs from noise surge generated in the load.
- Built-in varistor effectively absorbs external surges.



RC

Ordering Information

Isolation	Zero cross function	Indicator	Applicable output load	Rated input voltage	Model
Phototriac	No	No	1 A at 75 to 264 VAC (see note 1)	5 VDC	G3S-201PL-US
				12 VDC	
				24 VDC	
			1.2 A at 75 to 264 VAC (see note 1)	5 VDC	G3S-201PL-PD-US
				12 VDC	
				24 VDC	
Photocoupler			1 A at 3 to 26 VDC (see note 2)	5 VDC	G3SD-Z01P-US
				12 VDC	
				24 VDC	
			1.1 A at 3 to 26 VDC (see note 2)	5 VDC	G3SD-Z01P-PD-US
				12 VDC	
				24 VDC	

Note: 1. Product is labelled "250 VAC".
2. Product is labelled "24 VDC".

■ Accessories (Order Separately)

Heat Sink

Heat Sink	Y92B-S08N
-----------	-----------

See "Dimensions" for details.

Connecting Socket

Connecting Socket	P6B-04P
-------------------	---------

See "Dimensions" for details.

Specifications

■ Ratings

Input

Rated voltage	Operating voltage	Impedance		Voltage level	
		G3S-201PL/201PL-PD	G3S-Z01P/Z01P-PD	Must operate voltage	Must release voltage
5 VDC	4 to 6 VDC	450 W+20%	630 W+20%	4 VDC max.	1 VDC min.
12 VDC	9.6 to 14.4 VDC	1.1 kW+20%	1.5 kW+20%	9.6 VDC max.	
24 VDC	19.2 to 28.8 VDC	2.2 kW+20%	2.8 kW+20%	19.2 VDC max.	

Note: Each models has 5-VDC, 12-VDC, and 24-VDC input versions.

Output

Model	Applicable load		
	Rated load voltage	Load current	Inrush current
G3S-201PL	75 to 264 VAC	0.1 to 1 A	15 A (60 Hz, 1 cycle)
G3S-201PL-PD		0.1 to 1.2 A	
G3SD-Z01P	3 to 26 VDC	0.01 to 1 A	3 A (10 ms)
G3SD-Z01P-PD		0.01 to 1.1 A	

■ Characteristics

Item	G3S-201PL/201PL-PD	G3SD-Z01P/Z01P-PD
Operate time	1 ms max.	
Release time	1/2 of load power source cycle + 1 ms max.	1 ms max.
Output ON voltage drop	1.6 V (RMS) max.	1.5 V max.
Leakage current	2 mA max.	0.1 mA max. (at 26 VDC)
Insulation resistance	100 MW min. (at 500 VDC)	
Dielectric strength	2,500 VAC, 50/60 Hz for 1 min	
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude	
Shock resistance	Malfunction: 1,000 m/s ² (approx. 100G)	
Ambient temperature	Operating: -30% to 80°C (with no icing) Storage: -30% to 100°C (with no icing)	
Ambient humidity	Operating: 45% to 85%	
Weight	Approx. 13 g	


■ Approved Standards

UL508 File No.E64562/CSA C22.2 (No.0, No.14) File No. LR35535

Model	Ratings
G3S-201P(L)-(PD)-US	1 A at 240 VAC
G3SD-Z01P-(PD)-US	1 A at 24 VDC



Engineering Data

Load Current vs. Ambient Temperature Characteristics

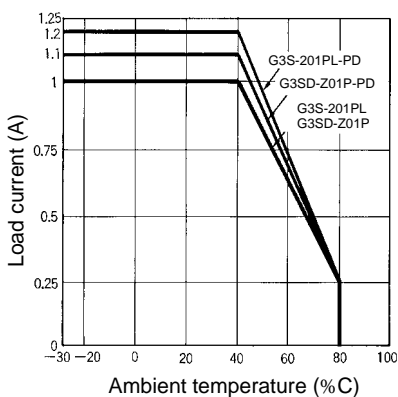

Inrush Current Resistivity



Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)

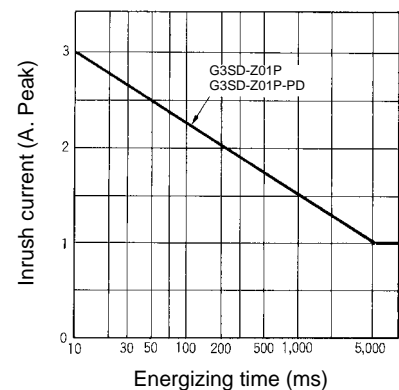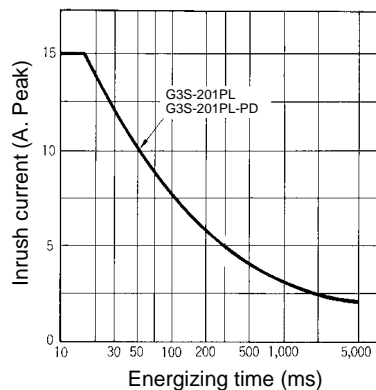


Dimensions

Note: All units are in millimeters unless otherwise indicated.


G3S/G3SD

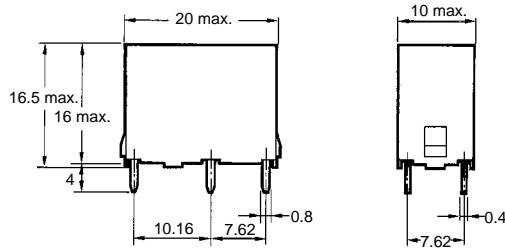

PCB Dimensions (Bottom View)


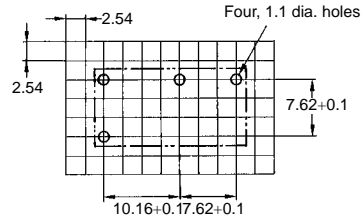


Terminal Arrangement/ Internal Connections (Bottom View)

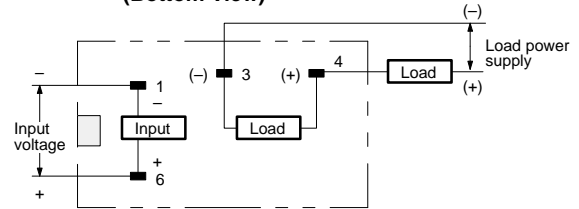


Note: Values in parentheses apply to the DC-load versions.

Connecting Socket P6B-04P

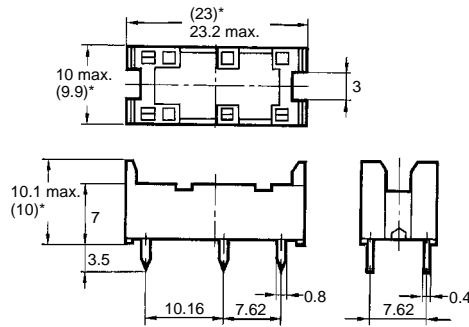



PCB Dimensions (Bottom View)

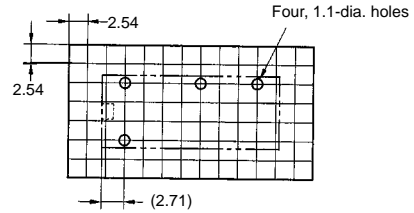


*Average value


Heat Sink Y92B-S08N

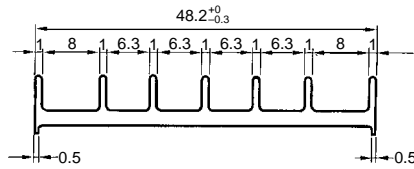

Mounting Bracket

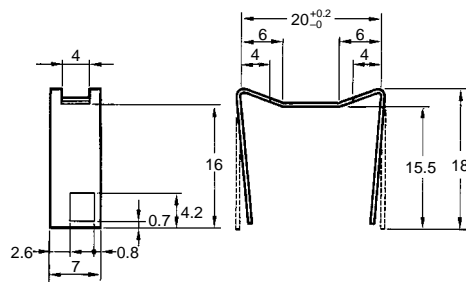

PCB Dimensions (Bottom View)

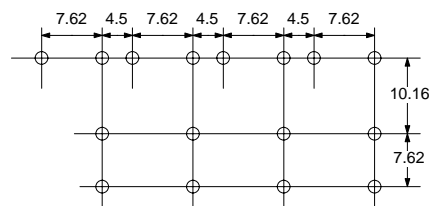


Precautions

Refer to pages 5 to 13 for general precautions.


Close Mounting

G3S-201PL-PD and G3SD-Z01-PD SSRs can be closely mounted side by side. Attach the Y92B-S08N Heat Sink to the SSRs mounted closely side by side. When these SSRs are mounted side by side, the load current vs. ambient temperature characteristic declines as shown on the right.

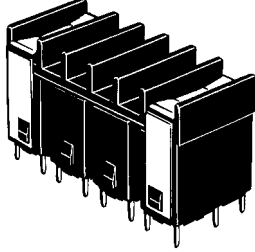

Load Current vs. Ambient Temperature Characteristics

(When four SSRs are mounted side by side and each of them is switched to the same load current.)

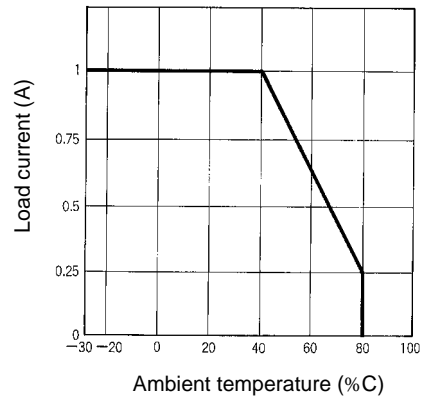

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.